


## Version 2018 CR-FI 电缆密封接头



### 产品特征

- 适用于非铠装电缆
- 连接钢管或挠性管
- 材质可选不锈钢或黄铜镀镍
- 密封件可选三元乙丙橡胶或硅胶
- 对电缆外层提供防爆密封和防水密封的作用
- 可用于爆炸性氛围IIA IIB IIC

适用电缆

应用行业

适用环境

防爆标记

防护等级

产品认证

可选附件

| 格兰尺寸   | 公制转英制                    |         |        | 密封电缆   | 外丝长度 |          | 内丝长度     |    | 扳手径 |
|--------|--------------------------|---------|--------|--------|------|----------|----------|----|-----|
|        | 订货编号                     | 外丝 (M)  | 内丝 (F) |        | A mm | L1(M) mm | L2(F) mm | SW |     |
| CRM20  | CR-FI12-M20(M)/G 1/2(F)  | M20*1.5 | G1/2   | Φ8-12  | 12   | 10       | 24       |    |     |
| CRM20L | CR-FI14-M20(M)/G 1/2(F)  | M20*1.5 | G1/2   | Φ9-14  | 12   | 10       | 26       |    |     |
| CRM25  | CR-FI18-M25(M)/G 3/4(F)  | M25*1.5 | G3/4   | Φ13-18 | 12   | 10       | 32       |    |     |
| CRM32  | CR-FI25-M32(M)/G1(F)     | M32*1.5 | G1     | Φ18-25 | 13   | 11       | 40       |    |     |
| CRM40S | CR-FI30-M40(M)/G1 1/4(F) | M40*1.5 | G1 1/4 | Φ24-30 | 15   | 12       | 48       |    |     |
| CRM40  | CR-FI32-M40(M)/G1 1/4(F) | M40*1.5 | G1 1/4 | Φ26-32 | 15   | 12       | 50       |    |     |
| CRM50  | CR-FI38-M50(M)/G1 1/2(F) | M50*1.5 | G1 1/2 | Φ31-38 | 15   | 12       | 60       |    |     |
| CRM63  | CR-FI44-M63(M)/G2(F)     | M63*1.5 | G2     | Φ37-44 | 15   | 12       | 73       |    |     |
| CRM72  | CR-FI52-M72(M)/G2 1/2(F) | M72*2   | G2 1/2 | Φ42-52 | 15   | 12       | 86       |    |     |
| CRM78  | CR-FI60-M78(M)/G3(F)     | M78*2   | G3     | Φ55-60 | 15   | 12       | 86       |    |     |
| CRM88  | CR-FI70-M88(M)/G3(F)     | M88*2   | G3     | Φ65-70 | 15   | 12       | 100      |    |     |

| 格兰尺寸     | 美制转英制                         |          |        | 密封电缆   | 外丝长度 |          | 内丝长度     |    | 扳手径 |
|----------|-------------------------------|----------|--------|--------|------|----------|----------|----|-----|
|          | 订货编号                          | 外丝 (M)   | 内丝 (F) |        | A mm | L1(M) mm | L2(F) mm | SW |     |
| CR1/2    | CR-FI12-NPT1/2(M)/G1/2(F)     | NPT1/2   | G1/2   | Φ8-12  | 12   | 10       | 24       |    |     |
| CR1/2L   | CR-FI14-NPT1/2(M)/G1/2(F)     | NPT1/2   | G1/2   | Φ9-14  | 12   | 10       | 26       |    |     |
| CR3/4    | CR-FI18-NPT3/4(M)/G3/4(F)     | NPT3/4   | G3/4   | Φ13-18 | 12   | 10       | 32       |    |     |
| CR1      | CR-FI25-NPT1(M)/G1(F)         | NPT1     | G1     | Φ18-25 | 13   | 11       | 40       |    |     |
| CR1 1/2S | CR-FI30-NPT1 1/4(M)/G1 1/4(F) | NPT1 1/4 | G1 1/4 | Φ24-30 | 15   | 12       | 48       |    |     |
| CR1 1/4  | CR-FI32-NPT1 1/4(M)/G1 1/4(F) | NPT1 1/4 | G1 1/4 | Φ26-32 | 15   | 12       | 50       |    |     |
| CR1 1/2  | CR-FI38-NPT1 1/2(M)/G1 1/2(F) | NPT1 1/2 | G1 1/2 | Φ31-38 | 15   | 12       | 60       |    |     |
| CR2      | CR-FI44-NPT2(M)/G2(F)         | NPT2     | G2     | Φ37-44 | 15   | 12       | 73       |    |     |
| CR2 1/2  | CR-FI52-NPT2 1/2(M)/G2 1/2(F) | NPT2 1/2 | G2 1/2 | Φ42-52 | 15   | 12       | 86       |    |     |
| CR3      | CR-FI60-NPT3(M)/G3(F)         | NPT3     | G3     | Φ55-60 | 15   | 12       | 86       |    |     |
| CR3L     | CR-FI70-NPT3(M)/G3(F)         | NPT3     | G3     | Φ65-70 | 15   | 12       | 100      |    |     |

\*内外丝可按要求定制


Email:sales@idl-cr.com  
Web:www.ex-cablegland.com  
www.idl-cr.com

The Company's policy is one of continuous improvement and reserves the right to change specifications at any time without prior notice

**IDL&CR·昂得立®**

power and productivity  
for a better world

## Version 2018 CR-FT 电缆密封接头

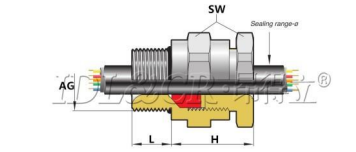

### 产品特征

- 适用于非铠装电缆
- 材质可选不锈钢或黄铜镀镍
- 密封件可选丁腈橡胶或硅胶
- 对电缆外层提供防爆密封和防水密封的作用
- 可用于爆炸性氛围IIA IIB IIC

适用电缆

应用行业

适用环境

防爆标记

防护等级

产品认证

可选附件

| M/PG<br>格兰尺寸 | 螺纹规格 (AG)       |                | 螺纹长度<br>(L mm) | 适用电缆外径范围<br>(A mm) |      | 六角<br>对边<br>(SW) |
|--------------|-----------------|----------------|----------------|--------------------|------|------------------|
|              | 编号 M            | 编号 PG          |                | 最小                 | 最大   |                  |
| CRM16        | CR-FT08-M16*1.5 | CR-FT08-PG9    | 14.0           | 5.0                | 8.0  | 22.0             |
| CRM20        | CR-FT13-M20*1.5 | CR-FT13-PG13.5 | 15.0           | 8.0                | 13.0 | 27.0             |
| CRM20L       | CR-FT16-M20*1.5 | CR-FT16-PG13.5 | 15.0           | 12.0               | 16.0 | 28.0             |
| CRM25        | CR-FT19-M25*1.5 | CR-FT19-PG21   | 16.0           | 15.0               | 19.0 | 36.0             |
| CRM32        | CR-FT24-M32*1.5 | CR-FT24-PG29   | 20.0           | 19.0               | 24.0 | 41.0             |
| CRM40S       | CR-FT28-M40*1.5 | CR-FT28-PG36   | 20.0           | 23.0               | 27.0 | 46.0             |
| CRM40        | CR-FT34-M40*1.5 | CR-FT34-PG36   | 20.0           | 27.0               | 33.0 | 50.0             |
| CRM50S       | CR-FT38-M50*1.5 | CR-FT38-PG42   | 20.0           | 33.0               | 38.0 | 58.0             |
| CRM50        | CR-FT42-M50*1.5 | CR-FT42-PG42   | 20.0           | 37.0               | 41.0 | 60.0             |
| CRM63S       | CR-FT46-M63*1.5 | CR-FT46-PG48   | 20.0           | 40.0               | 45.0 | 65.0             |
| CRM63        | CR-FT50-M63*1.5 | CR-FT50-PG48   | 20.0           | 45.0               | 49.0 | 70.0             |
| CRM72        | CR-FT52-M72*2   | CR-FT52-PG63   | 22.0           | 48.0               | 52.0 | 75.0             |
| CRM72L       | CR-FT58-M72*2   | CR-FT58-PG63   | 22.0           | 52.0               | 58.0 | 82.0             |
| CRM75        | CR-FT67-M75*1.5 | CR-FT67-PG63   | 22.0           | 58.0               | 66.0 | 85.0             |

| NPT/G<br>格兰尺寸 | 螺纹规格 (AG)        |                | 螺纹长度<br>(L mm) | 适用电缆外径范围<br>(A mm) |      | 六角<br>对边<br>(SW) |
|---------------|------------------|----------------|----------------|--------------------|------|------------------|
|               | 编号 NPT           | 编号 G           |                | 最小                 | 最大   |                  |
| CR1/2"S       | CR-FT08-NPT1/2   | CR-FT08-G1/2   | 14.0           | 5.0                | 8.0  | 22.0             |
| CR1/2"        | CR-FT13-NPT1/2   | CR-FT13-G1/2   | 15.0           | 8.0                | 13.0 | 27.0             |
| CR1/2"L       | CR-FT16-NPT1/2   | CR-FT16-G1/2   | 15.0           | 12.0               | 16.0 | 28.0             |
| CR3/4"        | CR-FT19-NPT3/4   | CR-FT19-G3/4   | 16.0           | 15.0               | 19.0 | 36.0             |
| CR1"          | CR-FT24-NPT1     | CR-FT24-G1     | 20.0           | 19.0               | 24.0 | 41.0             |
| CR1 1/4"      | CR-FT28-NPT1 1/4 | CR-FT28-G1 1/4 | 20.0           | 23.0               | 27.0 | 46.0             |
| CR1 1/4"L     | CR-FT34-NPT1 1/4 | CR-FT34-G1 1/4 | 20.0           | 27.0               | 33.0 | 50.0             |
| CR1 1/2"S     | CR-FT38-NPT1 1/2 | CR-FT38-G1 1/2 | 20.0           | 33.0               | 38.0 | 58.0             |
| CR1 1/2"      | CR-FT42-NPT1 1/2 | CR-FT42-G1 1/2 | 20.0           | 37.0               | 41.0 | 60.0             |
| CR2"          | CR-FT45-NPT2     | CR-FT45-G2     | 20.0           | 40.0               | 45.0 | 65.0             |
| CR2"L         | CR-FT50-NPT2     | CR-FT50-G2     | 20.0           | 45.0               | 49.0 | 70.0             |
| CR2 1/2"      | CR-FT52-NPT2 1/2 | CR-FT52-G2 1/2 | 22.0           | 48.0               | 52.0 | 75.0             |
| CR2 1/2"L     | CR-FT58-NPT2 1/2 | CR-FT58-G2 1/2 | 22.0           | 52.0               | 58.0 | 82.0             |
| CR2 1/2"      | CR-FT67-NPT2 1/2 | CR-FT67-G2 1/2 | 22.0           | 58.0               | 66.0 | 85.0             |

Email:sales@idl-cr.com  
Web:www.ex-cablegland.com  
www.idl-cr.com

The Company's policy is one of continuous improvement and reserves the right to change specifications at any time without prior notice

**IDL&CR·昂得立®**

power and productivity  
for a better world