


Version 2018

CR-KZIII 铠装电缆密封接头

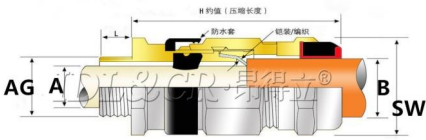

产品特征

- 用于编织电缆、钢带铠装电缆
- 材质可选不锈钢或黄铜镀镍
- 密封件可选丁腈橡胶或硅胶
- 对电缆外层提供防爆密封和防水密封的作用
- 对电缆内层提供防爆密封和防水密封的作用
- 可用于爆炸性环境IIA IIB IIC

适用电缆

应用行业

适用环境

防爆标记

防护等级

产品认证

可选附件

格兰尺寸	型号规格 (公制螺纹)		适用电缆范围		主体高度 H mm	螺纹长度 L mm	扳手径 SW
	AG	M系列编号	B mm	A mm			
CRM16S	M16*1.5	CR-KZIII08-M16	5.0-8.0	3.0-6.0	64	15	24
CRM16	M16*1.5	CR-KZIII10-M16	6.0-10.0	4.0-8.0	64	15	24
CRM20S	M20*1.5	CR-KZIII14-M20	9.0-14.0	6.0-11.0	64	15	24
CRM20	M20*1.5	CR-KZIII16-M20	11.0-16.0	7.0-12.0	65	15	30
CRM20L	M20*1.5	CR-KZIII18-M20	13.0-18.0	9.0-14.0	65	15	30
CRM25	M25*1.5	CR-KZIII21-M25	15.0-21.0	11.0-17.0	70	15	34
CRM25L	M25*1.5	CR-KZIII24-M25	17.0-24.0	13.0-20.0	70	15	40
CRM32	M32*1.5	CR-KZIII28-M32	20.0-28.0	16.0-23.0	75	15	45
CRM32L	M32*1.5	CR-KZIII32-M32	23.0-32.0	18.0-26.0	75	15	50
CRM40	M40*1.5	CR-KZIII35-M40	28.0-35.0	21.0-29.0	78	15	55
CRM40L	M40*1.5	CR-KZIII38-M40	31.0-38.0	25.0-32.0	78	15	57
CRM50	M50*1.5	CR-KZIII41-M50	34.0-41.0	28.0-35.0	93	15	60
CRM50L	M50*1.5	CR-KZIII44-M50	37.0-44.0	31.0-38.0	93	15	62
CRM63	M63*1.5	CR-KZIII48-M63	40.0-48.0	33.0-43.0	98	16	68
CRM63L	M63*1.5	CR-KZIII55-M63	45.0-55.0	36.0-47.0	98	16	70
CRM78S	M78*2	CR-KZIII61-M78	51.0-61.0	42.0-53.0	102	16	84
CRM78	M78*2	CR-KZIII68-M78	58.0-68.0	45.0-58.0	102	16	90
CRM88S	M88*2	CR-KZIII73-M88	62.0-73.0	52.0-62.0	105	18	97
CRM88	M88*2	CR-KZIII79-M88	67.0-79.0	56.0-67.0	105	18	102
CRM100	M100*2	CR-KZIII89-M100	78.0-89.0	65.0-75.0	110	18	115

格兰尺寸	型号规格 (英制/美制)		适用电缆范围		主体高度 H mm	螺纹长度 L mm	扳手径 SW
	G系列编号	NPT系列编号	B mm	A mm			
CR1/2S	CR-KZIII10-G1/2	CR-KZIII10-NPT1/2	6.0-10.0	4.0-8.0	64	15	24
CR1/2S	CR-KZIII14-G1/2	CR-KZIII14-NPT1/2	9.0-14.0	6.0-11.0	64	15	24
CR1/2	CR-KZIII16-G1/2	CR-KZIII16-NPT1/2	11.0-16.0	7.0-12.0	65	15	30
CR1/2L	CR-KZIII18-G1/2	CR-KZIII18-NPT1/2	13.0-18.0	9.0-14.0	65	15	30
CR3/4	CR-KZIII21-G3/4	CR-KZIII21-NPT3/4	15.0-21.0	11.0-17.0	70	15	34
CR3/4L	CR-KZIII24-G3/4	CR-KZIII24-NPT3/4	17.0-24.0	13.0-20.0	70	15	40
CR1	CR-KZIII28-G1	CR-KZIII28-NPT1	20.0-28.0	16.0-23.0	75	15	45
CR1L	CR-KZIII32-G1	CR-KZIII32-NPT1	23.0-32.0	18.0-26.0	75	15	50
CR1¼	CR-KZIII35-G1¼	CR-KZIII35-NPT1¼	28.0-35.0	21.0-29.0	78	15	55
CR1¼L	CR-KZIII38-G1¼	CR-KZIII38-NPT1¼	31.0-38.0	25.0-32.0	78	15	57
CR1½	CR-KZIII41-G1½	CR-KZIII41-NPT1½	34.0-41.0	28.0-35.0	93	15	60
CR1½L	CR-KZIII44-G1½	CR-KZIII44-NPT1½	37.0-44.0	31.0-38.0	93	15	62
CR2	CR-KZIII48-G2	CR-KZIII48-NPT2	40.0-48.0	33.0-43.0	98	16	68
CR2L	CR-KZIII55-G2	CR-KZIII55-NPT2	45.0-55.0	36.0-47.0	98	16	70
CR2½	CR-KZIII61-G2½	CR-KZIII61-NPT2½	51.0-61.0	42.0-53.0	102	16	84
CR2½L	CR-KZIII68-G2½	CR-KZIII68-NPT2½	58.0-68.0	45.0-58.0	102	16	90
CR3	CR-KZIII73-G3	CR-KZIII73-NPT3	62.0-73.0	52.0-62.0	105	18	97
CR3L	CR-KZIII79-G3	CR-KZIII79-NPT3	67.0-79.0	56.0-67.0	105	18	102
CR3½	CR-KZIII89-G3½	CR-KZIII89-NPT3½	78.0-89.0	65.0-75.0	110	18	115

Email:sales@idl-cr.com
 Web: www.ex-cablegland.com
 www.idl-cr.com
 The Company's policy is one of continuous improvement and reserves the right to change specifications at any time without prior notice

IDL&CR·昂得立®
 power and productivity
 for a better word

Email:sales@idl-cr.com
 Web: www.ex-cablegland.com
 www.idl-cr.com
 The Company's policy is one of continuous improvement and reserves the right to change specifications at any time without prior notice

IDL&CR·昂得立®
 power and productivity
 for a better word